


VX 675

PAY-ANYWHERE PERFORMANCE

Verifone's VX 675 is the world's smallest, all-in-one, wireless handheld payment device, ergonomically designed to fit comfortably in the palm of your hand. Incredibly advanced, sleek and elegant, the VX 675 is ideal for pay-anywhere, anytime environments.

NEW DESIGN, NEW OPPORTUNITIES

- The smallest, full-function, portable device on the market
- Enables long-range wireless payments for retailers on the go
- EMV Level 1 and 2 Type approvals, PCI PTS 3.0 approved, offering the best security

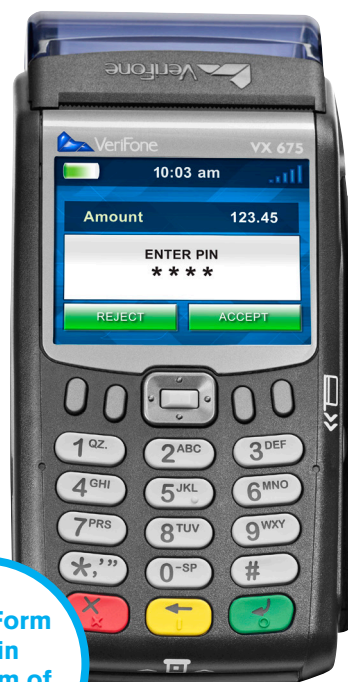

Small Form Fits in the Palm of Your Hand

SPECIFICATIONS

Processor	400 MHz ARM11 32-bit RISC processor
Memory	192MB (128MB Flash, 64MB SDRAM)
Display	2.8" QVGA
Connectivity	HSPA+ 3G radio 2.4GHz Wi-Fi Bluetooth 2.1
Printer	30 lps 40mm paper roll
Card Readers	Triple track MSR landed smart card
Contactless	ISO14443 A&B MiFare ISO18092 capable EMVCo L1 certification supports major NFC/contactless schemes
Other Standard Features	2 SAM slots
Base Station	USB base station: USB host/device connector and integrated charging Full-feature base station: Dial-up, Ethernet, RS-232, USB host/device connector, integrated charging BT base station: Dial-up, Ethernet, BT support, integrated charging
Power	Voltage: AC input 100-240 VAC, 50/60 Hz; DC output 5 VDC, 1A
Environmental	0° to 50° C (32° to 122° F) operating temperature -20° to 60° C (-4° to 140° F) storing temperature 5% to 90% relative humidity, non-condensing
Physical	Terminal: 163mm L x 78mm W x 52mm H Base Station: 131mm L x 84mm W x 42mm H



	VX 675 GPRS	VX 675 WF/BT	VX 675 3G
Terminal Connectivity	GSM/GPRS 850/900/1800/1900 MHz	Wi-Fi 802.11b/g/n Bluetooth local area	GSM/GPRS 850/900/1800/1900 MHz HSPA+ 850/900/1900/2100 MHz
Contactless	Optional	Standard	Standard
GPS	-	-	Standard
Peripheral Ports	USB device support, integrated charging	USB host and device support, integrated charging	USB host and device support, integrated charging
Dual SIM	-	-	Standard
Micro-SD	-	Standard	Standard
Battery	Li-Ion 3.6V/2200mAh	Li-Ion 3.7V/2450mAh	Li-Ion 3.7V/2450mAh
Physical	Terminal: 336g full shipping: 647g	Terminal: 337g full shipping: 732g	Terminal: 345g full shipping: 736g